
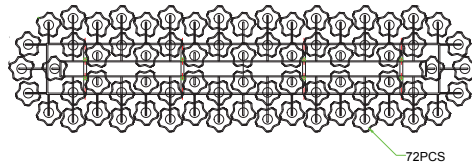


ASSEMBLY INSTRUCTION
GRACE LINEAR CHANDELIER 52"
MODEL NO. LC006319,
LC006321, LC006322,
LC006323

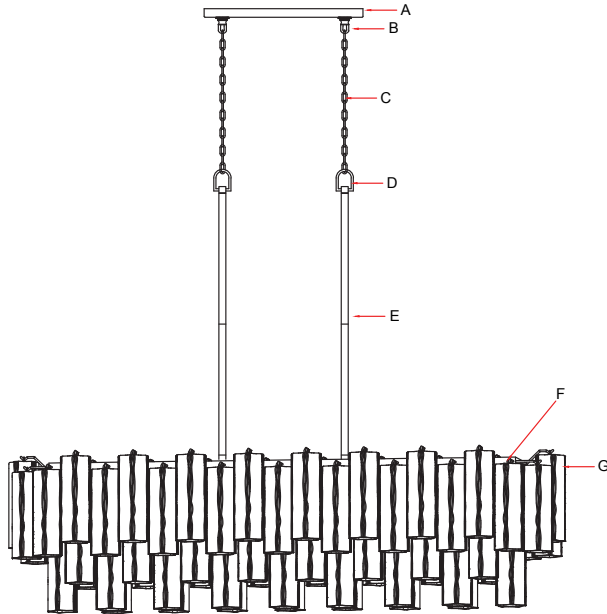

Dress the glass from inner ring
Make sure the grooves of the glass are
facing inward

PART NUMBER

- A. (1)-Canopy L14.5" *W5"*H1
- B. (2)-Collar loop
- C. (2)-Chain D5mm*72"
- D. (2)-Loop
- E. (4)-12"-D16mm-Rods
- F. (1)-Frame
- G. (72)-Glass D2 3/4XH7 3/4"



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 14-Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
This fixture is Dry Rated

HOW TO INSTALL

1. Decide the preferred hanging height and choose the correct length of rods and chain needed. the rods onto the top of the fixture. Attach the
2. Feed the wires through the rods and screw quick link on one end of the chain to the top of the rod. Repeat for the other rod using another chain.
3. Place the mounting plate over the outlet box and mark the points on the ceiling at the same distance as between the holes on the mounting plate.
4. Drill the holes at the marked points and insert the plastic anchors into it.
5. Attach the mounting plate onto the outlet box and secure with the anchor screws.
6. Feed the wires and safety cable through the collar loop and hickey on the mounting plate, assemble the collar loop into the hickey. Run the safety cable through the outlet box and wrap the safety cable around the ceiling joist and secure the cable with the clamp and set screws provided as shown. Raise the fixture up to the ceiling and do the wire connections. Put the canopy up against the ceiling and lock by tightening the screw collar loop ring.
7. Install the bulb into the socket.
8. Dress the glass as illustrated.