

INSTALLATION INSTRUCTIONS



IMPORTANT

Before installing your Lights.com fixture, please make sure that you carefully read through these instruction sheets. Consider having your fixture installed by a qualified licensed electrician.


NOTE: The important safeguards and instructions that appear in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that can't be built into any product. This approach must be used by the person(s) caring for and operating the fixture.

GENERAL INFORMATION

All electrical connections must be made in accordance with all ordinances, and Local and National Electrical Codes. These fixtures are intended for mounting to a standard 4" junction box. The box must be directly supported by the building structure and be ETL or U.L. Recognized.

STEP BY STEP INSTRUCTIONS

Before starting your installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box. **Just turning the light off at the light switch is not sufficient to prevent electrical shock.**

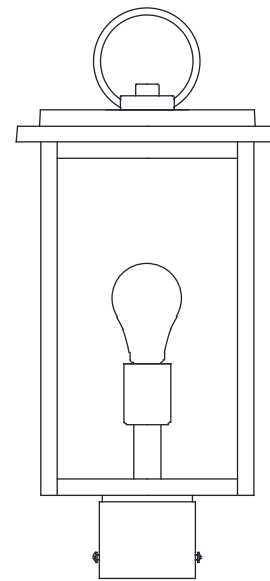

COLLECTION

Paterson

APPLICATION

Outdoor Post Light

MODEL NO.


LC005511

WHAT WE PROVIDE

- Post Light
- Mounting & Wiring Hardware

WHAT YOU NEED

- Phillips head Screwdriver
- Wire Cutters
- Wiring Supplies as Specified by Electrical Code
- 1 x 100W E26 Bulb

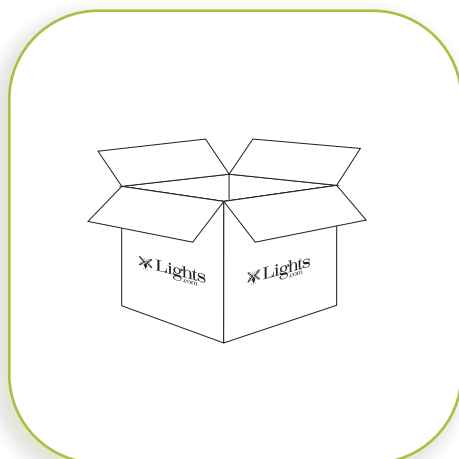


1

UNPACK YOUR FIXTURE

Carefully set aside all parts and pieces.


INSTALLATION INSTRUCTIONS

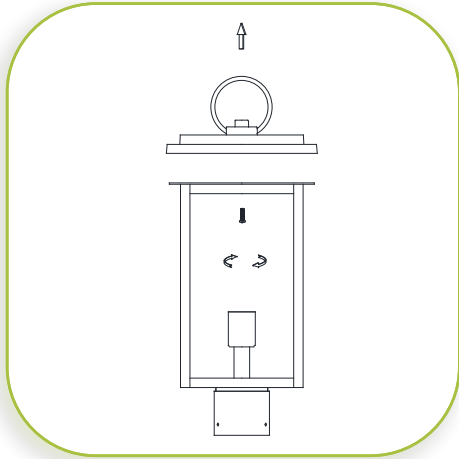

2

PREPARE FIXTURE


Remove top cover by unscrewing the screws on the cage.

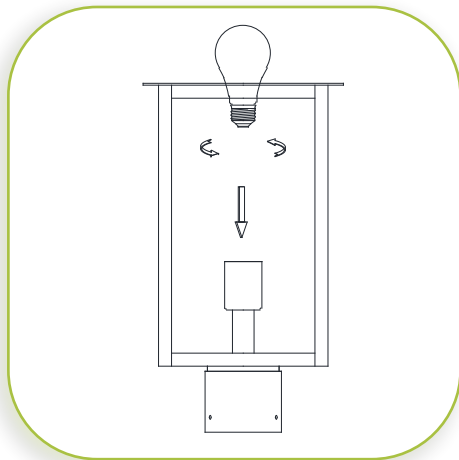

3

INSTALL BULB AND REPLACE TOP COVER

Install your E26 100W bulb, then replace the top cover and secure with the same screws. **DO NOT EXCEED THE WATTAGE AS STATED ON THE WARNING LABEL.**

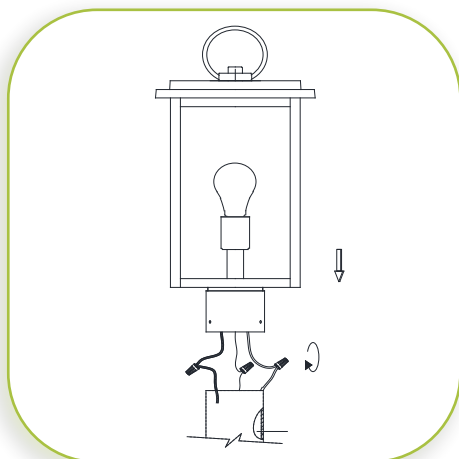


4

MAKE WIRE CONNECTION

Expose the wires from inside the post or mount. Connect BLACK Fixture wire to BLACK supply wire, the WHITE fixture wire to WHITE Supply wire, and the COPPER wire to the GROUND supply wire. Secure all connections with the supplied wire nuts. Push all wire connectors back into the post or mount.


INSTALLATION INSTRUCTIONS

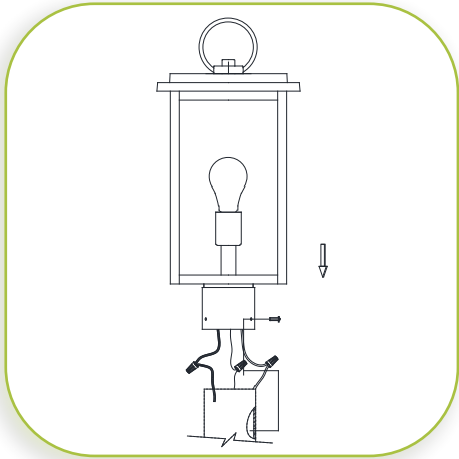

5

ATTACH POST TO MOUNT

Carefully slide the assembled fixture over the post or mount. Secure in place with the supplied screws.

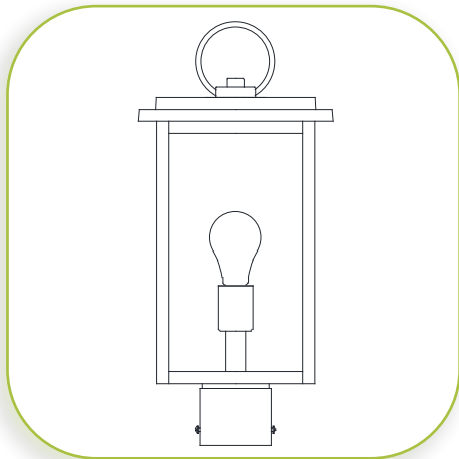

6

RESTORE THE ELECTRICITY AND CHECK THE OPERATION OF YOUR NEW FIXTURE

DIMMER NOTE

For the best lighting experience, we recommend using a dimmer. Not only does this allow you to create a great ambiance, it allows for energy savings and extends the life of the bulbs.